

# Unitech MS910/MS912 - Android

Copyright 2019 Ziiware Canada, Inc. All rights reserved.

## 1 Unpair the scanner



## 2 Unpair the Android device

1. Open the *Settings* app, and find the *Bluetooth* options.
2. Find the **Wireless Scanner** entry (may be under *Paired Devices*).
3. Choose to forget the Wireless Scanner pairing.

## 3 Configure the scanner with the following barcodes

Apply Factory Defaults



Send Lead and Check Digits



**Activate SPP mode** for pairing with Android devices



**Enable all symbologies** (ensures all supported codes can be scanned; to enable particular symbologies only, scan the appropriate codes from the user guide.



**Enable scanning MSI barcodes**



**Enable scanning UPC-E barcodes**






.H063\$



.H065\$

Transmit AIM Code ID (allows ZiiZii to detect symbology)

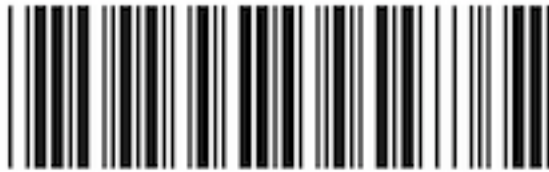

.A014\$

#### 4 Pair the scanner to an Android device

1. Ensure the scanner is powered on and configured for SPP mode.
2. Open *Settings*, locate *Bluetooth*, and choose “Pair a device”. The menus are arranged differently depending on the Android device.
3. Tap “Wireless Scanner” when it appears in the discovered devices.
4. Wait for the scanner to connect.
5. Open ZiiZii, and choose “Settings” from the main screen. Select “Generic SPP scanners” as the Bluetooth scanner module. The scanner should now connect, and a system notification will be available (swipe down from the top of the screen to see notifications) saying “1 Bluetooth scanner connected” while building orders.

#### 5 Android scanning help

1. Remember that all scanners must be unpaired, both on the scanner itself, and the device.
2. Android devices require all scanners to be in SPP mode **before** pairing with the device.